


CUT GRID AROUND VERTICAL STRUCTURES BEHIND WALL

DO NOT OVERLAP GRID LAYERS

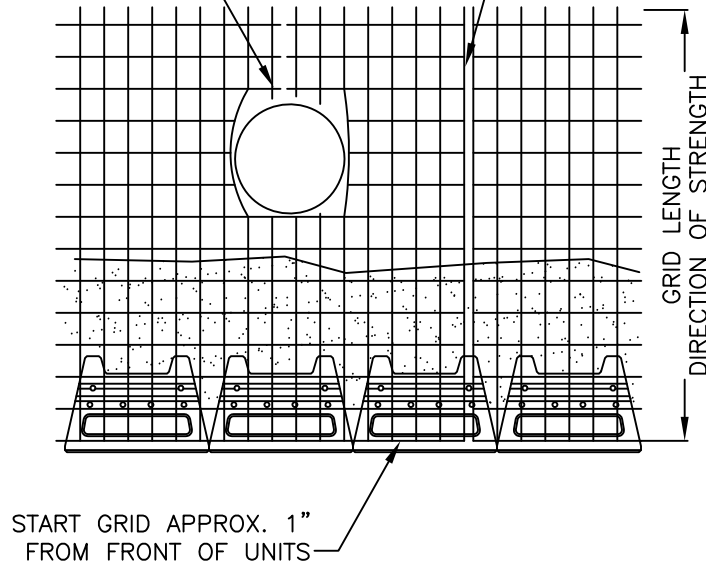

NOTE:


- FOLLOW GEOSYNTHETIC GRID MANUFACTURER'S INSTALLATION INSTRUCTIONS AND SPECIFICATIONS
- GEOGRID LENGTH AND ELEVATION PLACEMENT SHALL BE DETERMINED BY WALL DESIGN ENGINEER
- MINIMIZE CUTTING OF MACHINE DIRECTION STRANDS (THOSE RUNNING PERPENDICULAR TO THE WALL FACE) AS MUCH AS POSSIBLE
- DECREASE IN OVERALL GEOGRID STRENGTH DUE TO CUTTING SHOULD BE ACCOUNTED FOR IN THE DESIGN OF THE WALL

GEOSYNTHETIC AT STRUCTURES BEHIND WALL

SCALE: 1/2"=1'

PRELIMINARY

THIS DRAWING IS PRELIMINARY AND SHOULD BE USED FOR ESTIMATING PURPOSES ONLY. A FINAL DESIGN SHOULD BE PERFORMED BY A QUALIFIED REGISTERED ENGINEER. DETERMINATION OF THE SUITABILITY OF ANY INFORMATION OR MATERIAL FOR THE USE CONTEMPLATED, AND ITS MANNER OF USE, IS THE SOLE RESPONSIBILITY OF THE USER.



VERSA-LOK®
Retaining Wall Systems

(800)770-4525 fax(651)770-4089
6348 Hwy36 Ste1, Oakdale, MN 55128 **Solid Solutions™**

VERSA-LOK ULTRA DETAILS

GEOSYNTHETIC AT STRUCTURES

SCALE:	AS NOTED
DRAWN BY:	PDL
CHECKED BY:	
DATE:	8/2013
DWG. NO.	ULTRA GEOSYNTHETIC STR...